

REC'D 31 JAN 2005

TB/2005/050209



WIPO
Europäisches Patentamt PCT

European
Patent Office

Office européen
des brevets

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04100641.2 ✓

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:

Application no.: 04100641.2 ✓

Demande no:

Anmeldetag:

Date of filing: 18.02.04 ✓

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.

Groenewoudseweg 1

5621 BA Eindhoven

PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.

If no title is shown please refer to the description.

Si aucun titre n'est indiqué se référer à la description.)

Method and ballast for driving a high pressure gas discharge lamp

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01K9/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Method and ballast for driving a high pressure gas discharge lamp

The invention relates to a method for driving a high pressure gas discharge lamp during its steady state operation, wherein a steady state current signal is sent through the lamp for maintaining an arc in the lamp, comprising the step of comparing the lamp voltage response to a current step in said current signal with reference parameters; and in response to said comparison at least on of the steps comprising: stopping the power supply to the lamp, generating a signal indicating the end-of-life status of the lamp, generating a signal representing the lamp type, changing the steady state current (intensity) through the lamp, changing the steady state waveform of the current signal through the lamp.

10

Such a method was disclosed by K. Günther of OSRAM GmbH during the Seventh International Symposium on the Science & Technology of Light Sources, held from 27th to 31st August 1995 in Kyoto, Japan, and is described on pages 93 to 100 of the Symposium Proceedings, published in 1995 by The Illuminating Engineering Institute of Japan. The teachings of this document are incorporated herein by reference, in particular the teaching concerning the correlation between the electrical conductivity of the lamp and its photometric properties, as well as the teaching concerning response signal processing and analysis.

In said Symposium Proceedings it is suggested to detect the radiation properties of the lamp by analyzing the electrical conductivity response in a pulsed mode operation ballast, or in the case of a metal halide lamp by applying a power step to the lamp and measure the decay or rise time of the conductivity response. The first alternative is limited in its application to said pulsed operation mode, whereas the second alternative influences the operation of the lamp such that the intensity of the lamp will increase or decrease.

25

The object of the invention is to analyze the lamp conductivity response to a power step in such a way that the method is applicable to a broad range of operation modes,

while the intensity or color temperature of the lamp remains unchanged or alternatively can be changed in a controlled manner.

According to the invention said power step is obtained by sending a current pulse which is superimposed on the steady state current signal through the lamp.

5 Said steady state current signal thereby may have any form, for instance a perfect sinusoidal form or a pure DC, or combinations thereof. Furthermore the duration of the superimposed pulse may be shorter than the decay or rise time of the voltage response (typically $10\mu\text{s}$ – 1.5ms) of a current step in the aforementioned known alternative would be, and rather than measuring the decay or rise time of the voltage response the form of response
10 may be analyzed.

In a first preferred embodiment the duration of said pulse is preferably shorter than the duration of the half period of the AC current component of the steady state current signal. The superimposed pulse can also be a negative pulse, or a “dip” in the signal.

15 In a second preferred embodiment, for instance in a high frequency operation mode, the duration of said pulse is a multitude of the duration of the period of the AC current component of the steady state current signal, wherein preferably the pulse is comprised of a temporarily intensified amplitude of said AC current component of the steady state current signal.

20 Preferably the step of comparing the voltage response comprises measuring the decay time of the voltage and comparing it to a reference decay time, or analyzing the shape of the response signal and comparing it to reference values.

25 In a further preferred embodiment the step of changing the steady state waveform comprises the step of superimposing a recurring power pulse on said steady state waveform, which is for instance a square or sinusoidal wave, for instance for changing the color temperature of the lamp. In this manner the waveform is changed to a more complex recurring form which has an effect on the color temperature of the lamp without necessarily having much influence on the intensity of the lamp.

30 The invention further relates to a ballast for driving a high pressure gas discharge lamp comprising power supply means for sending a steady state current signal through the lamp for maintaining an arc in the lamp, response comparing means for comparing the lamp voltage response to a current step in said current signal with reference parameters; and responding means for stopping the power supply to the lamp, generating a signal indicating the end-of-life status of the lamp, generating a signal indicating the lamp type, changing the steady state current through the lamp, and/or changing the steady state

waveform of the current signal through the lamp in response to said comparison, wherein said ballast further comprises pulse means for sending a current pulse which is superimposed on said steady state current signal through the lamp for obtaining said current step. Means for implementing the aforementioned preferred method embodiments may be comprised in said
5 ballast, whether separately or in combination.

An embodiment of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

10 Fig. 1 shows a ballast and lamp configuration;

Fig. 2 shows an example of a steady state square waveform, a recurring pulse, the combined signal and its dynamic voltage response used in the method according to the invention; and

15 Fig. 3 shows a plot of various white HPS lamp examples of different age having different color temperature values as indicated, plotted against their dynamic voltage response decay time (τ) as well as the lamp voltage (V_{la}).

With reference to Figure 1, an electronic ballast 10 is connected to a high
20 pressure gas discharge lamp 11 which contains an arc tube 12 having electrodes 13, 14 sealed into opposing ends of arc tube 12. The first electrode 13 is connected to one terminal of ballast 10, and the remaining electrode 14 is connected to the remaining terminal of ballast 10.

In particular White HPS lamps suffer from loss of sodium from the amalgam
25 fill in the arc tube due to corrosion or diffusion during their life, which leads to a lower color temperature of the lamp. White HPS lamps require some form of electronic control to keep the color of the lamps between acceptable limits. A control algorithm used in practice is based on the existence of a correlation between the color temperature of the lamp and the lamp voltage. This correlation is based on the fact that both the spectral distribution and the
30 electrical characteristics are directly determined by the Na and Hg vapour pressures. This, however, holds only in case of a well-defined relation between these vapour pressures, which is only the case for a fixed amalgam composition. It fails in a situation where, for example, the amalgam composition changes as a result of Na corrosion or diffusion as the lamp ages. The impact of Na corrosion processes - even at the high Na vapour pressures in this type of

lamps - can suppressed sufficiently to obtain adequate lamp life. However, as the lamp ages, ultimately a point will be reached where the Na loss becomes significant. The consequence of this is that the known color control approach based on a sensing of the steady state electrical lamp characteristics has to fail. For old lamps (with severe loss of Na) a large drop in the color temperature is noticed as compared to lamps with the same lamp voltage, resulting in an unacceptable yellowish appearance of the lamp. It was one object of the invention to detect this decreased color temperature in order to determine the end-of-life of the lamp 11 if the color temperature is below an acceptable limit, without the need for optical measuring instruments such as photo diodes.

10 Therefore according to Figure 2 a short (1.4 ms wide) current power pulse (G2) is superimposed on its steady state low frequency (90 Hz) square wave current signal (G1) of an electronic ballast operating 100 W white HPS lamps, resulting in a combined current signal (I lamp). Then the dynamic response of the lamp voltage (V lamp) is detected by the electronic circuit of the ballast 10 and a characteristic decay or rise time (τ) can be
15 determined. The decay time will in general vary in the range between about $1\mu\text{s}$ and about 1.5ms.

It appears from Figure 3 that the response time, in particular the decay or rise time (τ) as a reaction to the applied power pulse for lamps with sodium loss (having a lower color temperature) appear to be longer.

20 From Figure 3 it also appears that lamps 11 having a higher than normal color temperature show a higher lamp voltage (V_{la}) related to a higher cold spot temperature of the lamp 11, which was already a known effect (see for instance European patent application EP-A-2281123). However lamps having a lower than average color temperature equally show a higher lamp voltage (V_{la}), as can be seen in Figure 3. By an additional evaluation of the
25 voltage response to a current pulse both types of deviation can be discriminated from each other.

In this example lamps complying with $V_{la} > 105\text{ V}$ AND $\tau < 90\mu\text{s}$ could be identified as having a too high color temperature ($> 2700\text{ K}$), whereas lamps complying with $\tau > 90\mu\text{s}$ could be identified as having a too low color temperature ($< 2400\text{ K}$).

30 In reaction to said identification the lamp 11 can be switched off. It is also possible, for example in a high aspect ratio HID burner with a sodium cerium filling, to influence the color temperature of the lamp 11 in reaction to and depending on the determined value of τ . This can be done for instance by adding a sufficiently high unidirectional direct current component to the alternating current and/or by superimposing a

sufficiently high and wide recurring pulse to the current. Preferably such a recurring pulse which is applied for changing the color temperature of the lamp is at the same time used to trigger the aforementioned voltage response.

- 5 It was found that both measures, adding a DC current component and current pulses, can influence the color temperature of various types of high pressure gas discharge lamps 11, and that it can be applied in a controlled manner by using appropriate control circuitry in the ballast, which will however be apparent for the man skilled in the art. ...

CLAIMS:

1. Method for driving a high pressure gas discharge lamp (11) during its steady state operation, wherein a steady state current signal (G1) is sent through the lamp (11) for maintaining an arc in the lamp (11), comprising the step of comparing the lamp voltage response (V_{lamp}) to a current step in said current signal with reference parameters; and in response to said comparison at least one of the steps comprising: stopping the power supply to the lamp (11), generating a signal indicating the end-of -life status of the lamp (11), changing the steady state current through the lamp (11), changing the steady state waveform of the current signal through the lamp (11), generating a signal indicating the lamp type, characterized in that said current step is obtained by sending a current pulse (G2) which is superimposed on said steady state current signal (G1) through the lamp (11).
2. Method according to claim 1, wherein the steady state current signal (G1) comprises an alternating current component.
3. Method according to claim 2, wherein the duration of said pulse (G2) is shorter than the duration of the half period of the AC current component or the half period of the AC current signal of the steady state current signal (G1).
4. Method according to claim 1, 2 or 3, wherein the superimposed pulse (G2) is a negative pulse.
5. Method according to claim 2, wherein the duration of said pulse (G2) is a multitude of the duration of the period of the AC current component of the steady state power signal (G1), wherein preferably the pulse (G2) is comprised of a temporarily intensified amplitude of said AC current component of the steady state power signal (G1).
6. Method according to any of the previous claims 1 - 4, wherein the step of comparing the voltage response (V_{lamp}) comprises measuring the decay or rise time (τ) of the voltage and comparing it to a reference decay or rise time.

7. Method according to any of the previous claims 1 - 4, wherein the step of comparing the voltage response (V_{lamp}) comprises analyzing the shape of the response signal and comparing it to reference values.
- 5 8. Method according to any of the previous claims 1 - 4, wherein the step of changing the steady state waveform (G1) comprises the step of superimposing a recurring current pulse (G2) on said steady state waveform.
- 10 9. Ballast (10) for driving a high pressure gas discharge lamp (11) comprising power supply means for sending a steady state current signal (G1) through the lamp (11) for maintaining an arc in the lamp (11), response comparing means for comparing the lamp voltage response (V_{lamp}) to a current step in said current signal with reference parameters; and responding means for stopping the power supply to the lamp (11), generating a signal
15 indicating the end-of-life status of the lamp (11), generating a signal indicating the lamp type, changing the steady state current through the lamp (11), and/or changing the steady state waveform of the current signal through the lamp (11) in response to said comparison, characterized in that said ballast (10) further comprises pulse means for sending a current
20 pulse (G2) which is superimposed on said steady state current signal (G1) through the lamp (11) for obtaining said current step.

ABSTRACT:

Method for driving a high pressure gas discharge lamp during its steady state operation, wherein a steady state current signal is sent through the lamp for maintaining a glowing arc in the lamp, comprising the step of comparing the lamp conductivity response to a current step in said current signal with reference parameters; and in response to said

5 comparison at least on of the steps comprising: stopping the current supply to the lamp, generating a signal indicating the end-of-life status of the lamp, changing the steady state current through the lamp, changing the steady state waveform of the current signal through the lamp, generating a signal indicating the lamp type, wherein said current step is obtained by sending a current pulse which is superimposed on said steady state current signal through

10 the lamp.

Fig. 1

1/2

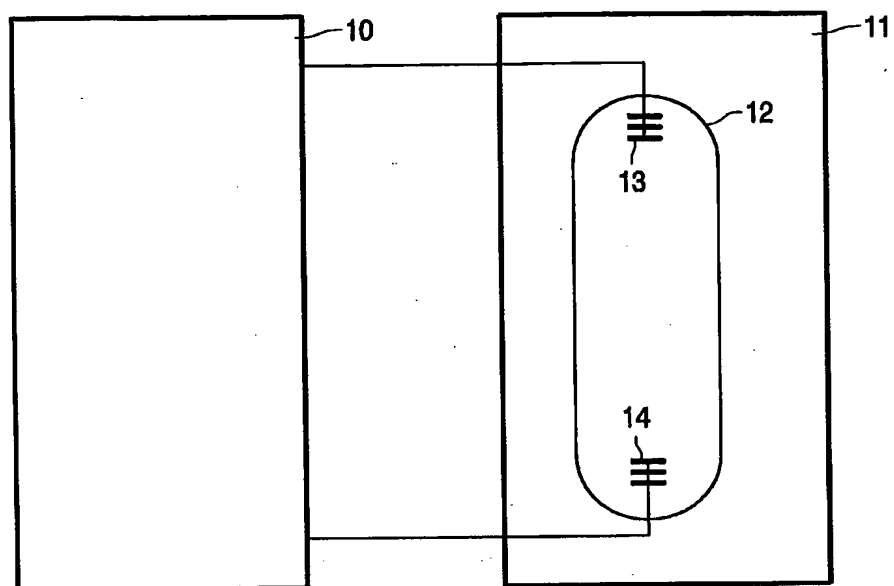


FIG. 1

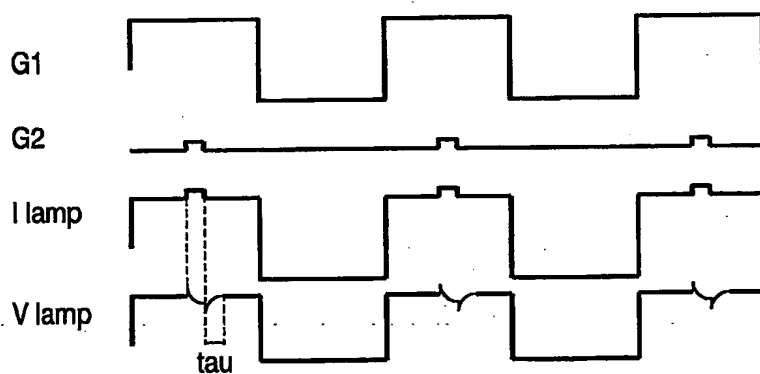


FIG. 2

2/2

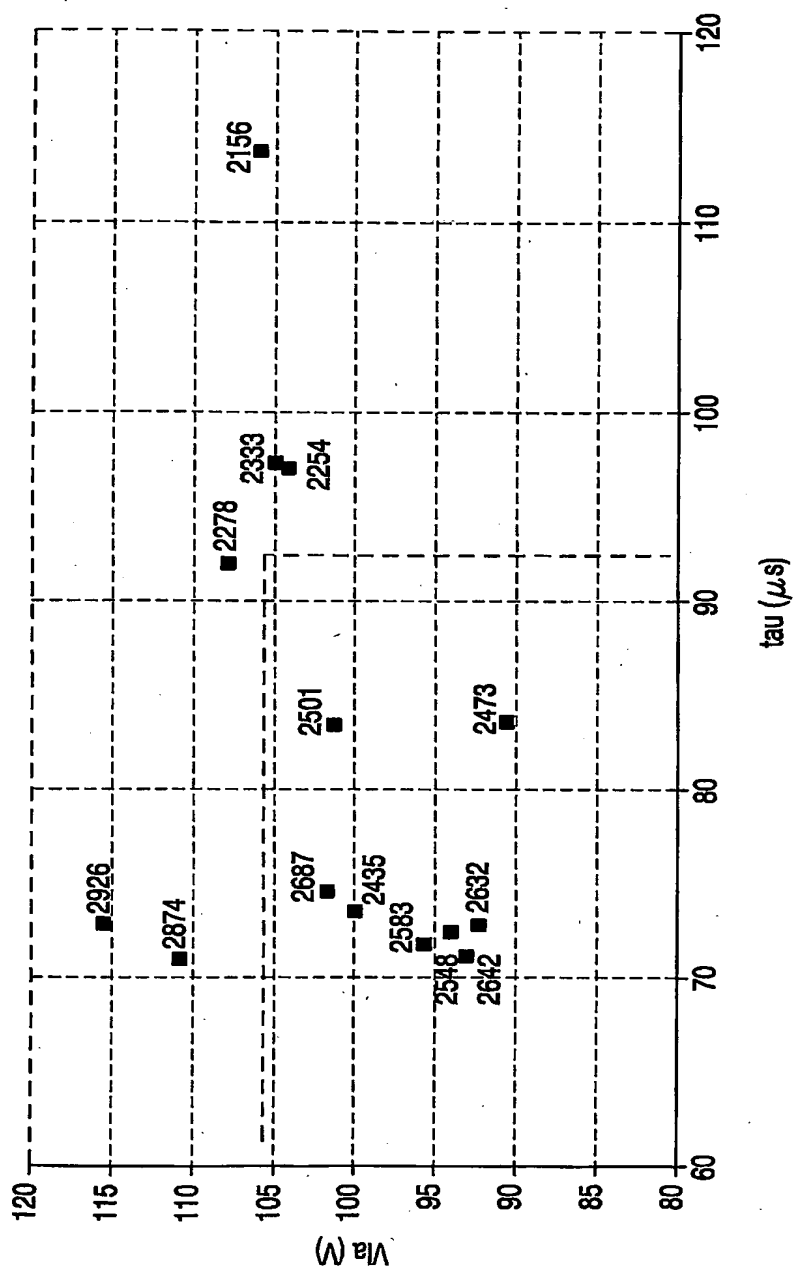


FIG. 3

PCT/IB2005/050209

